

Beacon

SPECIFICATION DOCUMENT

RICOMAN®




5 YR
WARRANTY

IP65

Overview

A robust exterior die-cast aluminium LED bollard with a classic look suitable for most applications. Easy to install, Beacon is ideal along driveways or footpaths. It comes in 3000K or 4000K with dome, flat or louvre effect.



Finish:  **Black RAL9005**

Power: **25W**


Kelvin: **3000K** **4000K**

UK
CA

CE

✓
RoHS

Technical Drawings

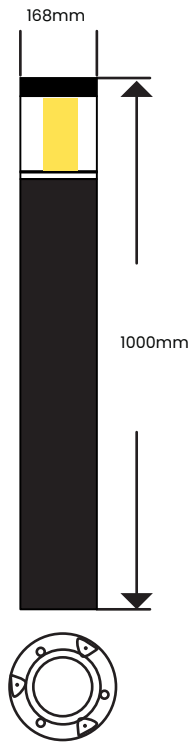

Overview

Applications	Exterior
Construction Material	Die Cast Aluminium
Diffuser Type	Glass
IP Rating	IP65
IK Rating	IK07
Mounting	Ground (flange) mounted
Weight (kg)	6.95
Ambient Temperature	-20°C to +45°C
Warranty	5 years

Luminaire Output

Colour Temperature	3000K 4000K
CRI	>80 Ra
Efficacy	~30-80 lm/W
Beam Angle	50°
Operating Hours	50,000

Supply & Power

Voltage Range	AC220-240V
Power Factor	>0.95
Inrush Current	<60A
Protection Class IEC	Class I
Driver	Integral

Product Codes & Specifications

Code	Design	Kelvin	Lumens
R301014/3K/25W	Dome	3000K	2000
R301024/3K/25W	Flat Top	3000K	2000
R301034/3K/25W	Louvre	3000K	720
R301014/4K/25W	Dome	4000K	2000
R301024/4K/25W	Flat Top	4000K	2000
R301034/4K/25W	Louvre	4000K	720

Additional Accessories

Code	Accessory
R3010-01	Beacon Root Mount Kit

R3010-01

