

Blade

SPECIFICATION DOCUMENT

RICOMAN®






3 YR
WARRANTY

IP20

SELF
TEST

Overview

A 3-hour LED emergency exit sign offering ease of installation along with a sleek aesthetic, accommodating nearly all installation scenarios including surface, recessed, suspended and side mounting. All mounting kits and all legends are included.



Finish:  White

Power: 3W

Kelvin: 6000K

UK
CA


CE

RoHS

ISO7010

BSI:5266:2011

Technical Drawings

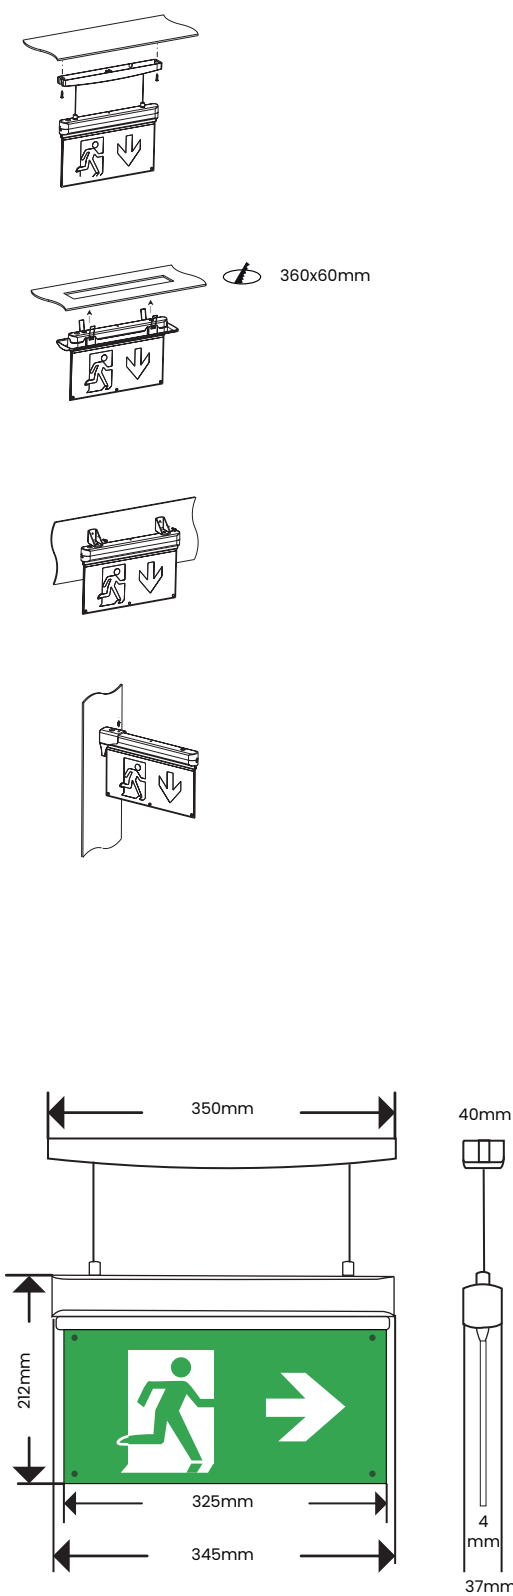

Overview

Applications	Interior
Construction Material	Polycarbonate
Diffuser Type	Polyvinyl Chloride
IP Rating	IP20
IK Rating	IK08
Mounting	Surface, recessed, suspended and side / flagpole mounting
Ambient Temperature	0°C to +40°C
Weight (kg)	0.69
Max.viewing distance	25m
Warranty	3 years

Luminaire Output

Colour Temperature	6000K
Beam Angle	108°
Operating Hours	30,000
Battery duration	>3 hours
Self-test	Yes
Recharge time	24 hours

Supply & Power

Voltage Range	AC220-240V
Power Factor	>0.30
Inrush Current	<60A
Running Current	DC250mA
Protection Class IEC	Class II
Maintained	Non maintained

Product Codes & Specifications

Code	Description	Lumens
R231101/ALL	Blade exit sign with all the arrows provided	20

Additional Accessories

All legends and mounting kits supplied as standard



Installation examples

Local Blackfriars & Telford Plaza Apartments, UK



Willow Wood Primary School, Cheshire, UK



Hallam Tower Apartments, Sheffield, UK

