



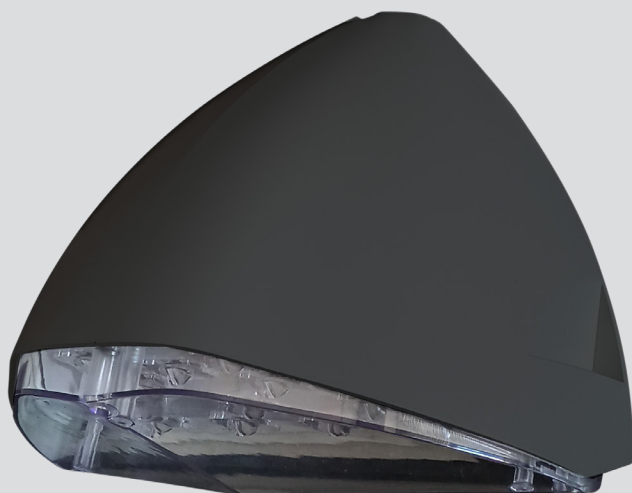

Overview

Exterior wall pack IP65 and IK10 rated, in three different finish options. Flosse is available in three outputs delivering up to 3500 lumens. With a modern and minimalist design, screw-less from front with back or side cable entry options, it is ideal for many different exterior applications.





- Finish:
- ☐ White RAL9002
 - ☐ Black RAL9005
 - ☐ Antracite RAL7016

Power: 13W - 28W

Kelvin: 3000K 4000K

Technical Drawings

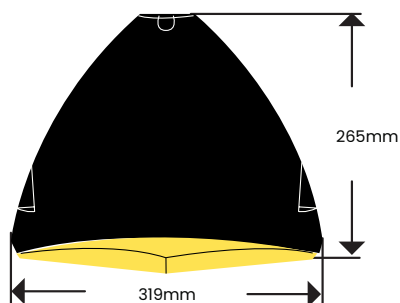

Overview

Applications	Exterior
Construction Material	Cast Aluminium
Diffuser Type	Polycarbonate
IP Rating	IP65
IK Rating	IK10
Mounting	Wall mounted
Weight (kg)	2.85
Ambient Temperature	-20°C to +45°C (0°C to 40°C for emergency)
Warranty	5 years

Luminaire Output

Colour Temperature	3000K 4000K
CRI	>80 Ra
Efficacy	~125 Lm/W
Beam Angle	120°
Operating Hours	50,000
Macadam Ellipse	≤6 sdc _m
L70 B50	70,000 hours

Supply & Power

Voltage Range	AC220-240V
Power Factor	>0.90
Inrush Current	10A for 100µs
Protection Class IEC	Class I
Driver	Integral
Cable entry	Back and side entry option

Product Codes & Specifications

Code	Power	Kelvin	Lumens	Running Current
R301301/3K/13W	13W	3000K	1711	DC350mA
R301301/4K/13W		4000K	1757	
R301301/3K/18W	18W	3000K	2385	DC500mA
R301301/4K/18W		4000K	2453	
R301301/3K/28W	28W	3000K	3403	DC725mA
R301301/4K/28W		4000K	3487	

Options

Suffix	Option
/WT	White body
/AN	Anthracite body
/BK	Black body
/3K	3000K
/4K	4000K
/MW	Sensor
/13W	13W
/18W	18W
/28W	28W
/E	Emergency

Full Code Example: R301301/BK/3K/18W Flosse 18W black body in 3000K

