

Praevo

SPECIFICATION DOCUMENT

RICOMAN®



3 YR
WARRANTY


IP20

SELF
TEST

TP(α)

Overview

Self-test stand alone 3 hour LED emergency recessed downlight. It is available with open area and corridor optic options included and comes with integrated electronics.



Finish: ☐ White
☒ Black

Power: 1W


Kelvin: 6500K

UK
CA

CE

✓
RoHS

Technical Drawings (mm)

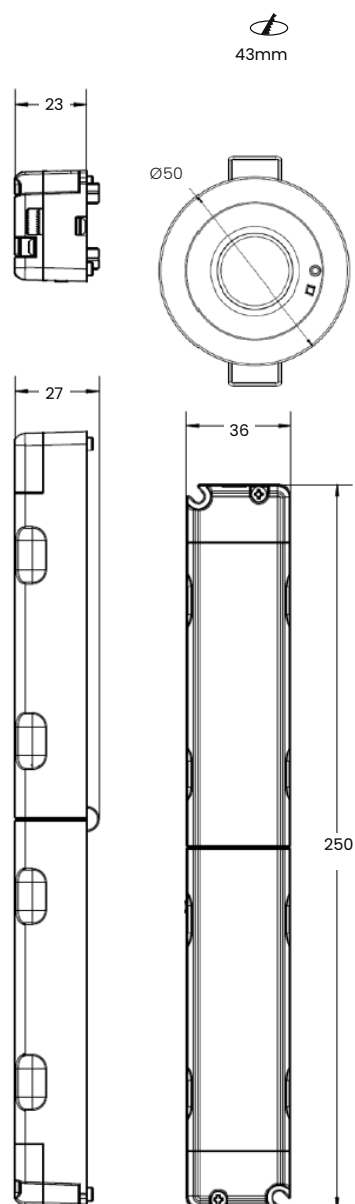

Product Codes & Specifications

Code	Description
R221505/ALL/WT	Praevo, self test emergency downlight with Open area & corridor included in White
R221505/ALL/BK	Praevo, self test emergency downlight with Open area & corridor included in Black

Overview

Applications	Interior
Construction Material	Polycarbonate
Diffuser Type	Polycarbonate-TP(a) rated
IP Rating	IP20
IK Rating	IK04
Mounting	Recessed
Weight (kg)	0.40
Ambient Temperature	5°C~45°C
Warranty	3 years
Cut Out	Ø43

Luminaire Output

Colour Temperature	6500K
Operating Hours	30,000
Beam Angle	1165°(OA) / 160 x 50° (C)
Battery Type	LI-FE PO4 (Lithium Phosphate)
Battery Duration	>3 hours

Supply & Power

Voltage Range	AC220-240V
Power Factor	0.34
Inrush Current	3A
Running Current	0.01A
Protection Class IEC	Class II
Maintained	Non maintained
Self Test	Yes