


Silbar Bollard

SPECIFICATION DOCUMENT

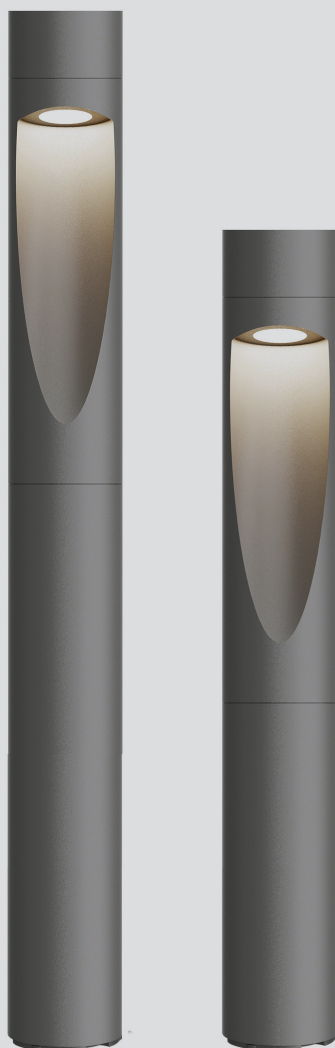

3 YR
WARRANTY

IP 65

IK09

Overview


The Silbar bollard light is a stylish and architectural light that is perfect for outdoor applications. The sleek, cylindrical shape is reminiscent of a whistle, and the tempered glass lens adds a touch of sophistication. The aluminum body is both impact- and corrosion-resistant, making it ideal for use in harsh outdoor environments. Available in a choice of 800 or 1000mm heights each delivering 15W of 3000K light.

UK
CA

CE

RoHS

RICOMAN®



Finish:  **Grey RAL9007**

Power: **15W**

Kelvin: **3000K**

Silbar Bollard

SPECIFICATION DOCUMENT

RICOMAN®

Product Codes & Specifications

Part Code

Silbar Bollard 800mm 15W in 3000K	R30I040/3K/P800
Silbar Bollard 1000mm 15W in 3000K	R30I040/3K/P1000

Physical Data

Colour Finish	Grey RAL9007
Construction Material	Aluminium
Mounting	Ground Mounted


Luminaire Output

Colour Temperature	3000K
CRI	>80 Ra
Efficacy	~70 Lm/W
Beam Angle	130°
Operating Hours	50,000
IK Rating	IK09
IP Rating	IP65
L70 B50	>50,000 hours
LEDs	5 x SMD 2835
Wattage	15W

Supply & Power

Voltage Range	AC200-240V
Power Factor	>0.94
Inrush Current	20A
Running Current	DC450mA
Protection Class IEC	Class I
Driver	Integral

Photometry

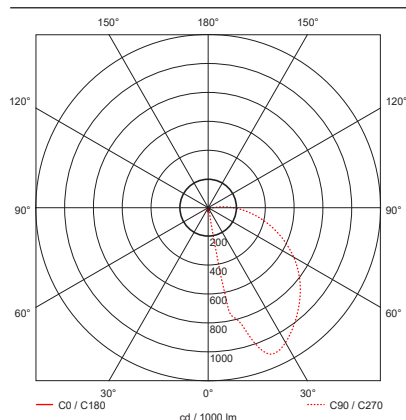

Silbar 800mm Dimensions (mm)



Silbar 1000mm Dimensions (mm)

